

www.sapido.com.tw

Quick Installation Guide (V1.1)

簡易安裝操作指南

5/8 埠超高速GIGABIT乙太網路交換器 5/8 Port GIGABIT Switch

HG-3105/HG-3108

SAPIDO Technology Inc.

383, Sec. 2, Minsheng Rd., West Central District,
Tainan City 700, Taiwan

☎ 886-6-2280698 📠 886-6-2293658

✉ sales@sapido.com.tw

Package Content / 包裝內容物:

5/8 Port GIGABIT Switch *1 5/8埠超高速GIGABIT乙太網路交換器*1
Power Adapter*1 變壓器 *1
Quick Installation Guide*1 簡易安裝操作指南 *1

Device Introduction/ 部品介紹:

LED Indicators / LED 狀態指示燈

Power LED: LED is on means the switch is power on.

Ethernet Speed/ Link/Act LED:

1. The solid LED means well connection, and the flash LED represents data transmitting.

2. The meanings of LED color

- Orange On: 1000Mbps Gigabit connected
- Orange Flash: 1000Mbps Gigabit connection activity
- Green On: 10/100Mbps connected
- Green Flash: 10/100Mbps connection activity

電源指示燈 - 亮起表電源正常。

乙太網路速度/連線/傳輸指示燈

1. 恆亮時表示連線正常，閃爍時表示該連接埠正在傳輸資料。

2. 指示燈的顏色狀態

- 橘色燈號恆亮: 以1000Mbps連線中
- 橘色燈號閃爍: 以1000Mbps傳輸中
- 綠色燈號恆亮: 以10/100Mbps連線中
- 綠色燈號閃爍: 以10/100Mbps傳輸中

【The Front Panel/正面面板】



Front Panel of HG-3105-
HG-3105 正面




Front Panel of HG-3108-
HG-3108 正面



Ethernet Speed/ Link/Act

Power/電源


【The Rear Panel / 背面板】

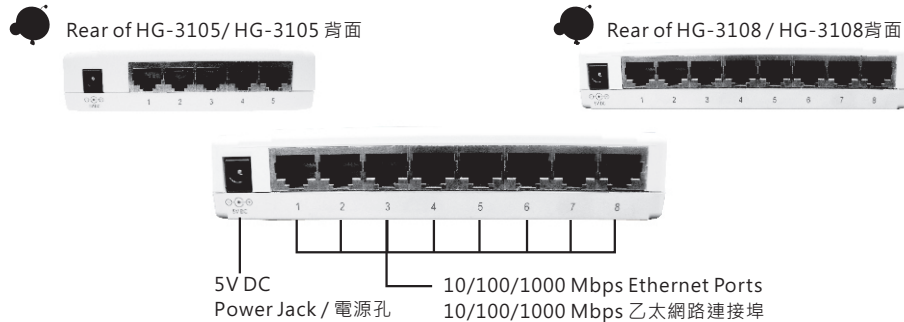

Installation / 安裝:


Step 1 / 步驟一:

Use Ethernet Cable to connect any Ethernet port on the switch with network devices (modem or router).
將網路線一端連接到交換器背後的連接埠，再將另一端連接到網路設備(數據機或是路由器)。

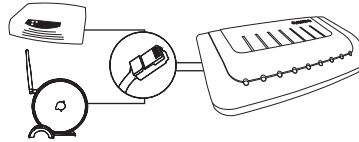

Step 2 / 步驟二:

Use Ethernet Cable to connect any Ethernet port on the switch with PC.
將網路線一端連接到交換器背後的連接埠，再將另一端連接到電腦。

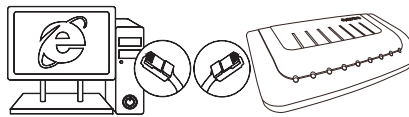

Step 3 / 步驟三:

Connect the power adapter into the back of the switch, and then power on the unit. After that, the Power LED will be on, and the Ethernet Speed/ Link/Act LEDs which correspond to the Ethernet ports linked with PC or device will also be on.

將變壓器連接交換器背面的電源插孔，再插入電源插座。

此時交換器電源燈會亮起，交換器上有連接電腦或網路設備的網路連接埠的對應燈號也會亮起。



Q&A / 常見問題:

Q: The Power LED is off.

A: The Switch is power off.

Please check whether the power adapter is properly plugged in the socket.

If it is well plugged, make sure the socket is on.

Q: Ethernet Speed/ Link/Act LED is not lit for a connected device.

A: Please make sure the cable connectors are securely plugged in at the switch and the device.

Also, check the connected device is turned on and installed correctly.

問: 電源燈未亮

答: 電源燈未亮則無電源，請確認變壓器是否正確接再電源插座上。

若已接上插座，確定電源插座是在開啟狀態。

檢查變壓器是否已連接至交換器電源插孔，並確認沒有鬆脫。

問: 網路接線連接埠的燈沒有亮

答: 請確定連接交換器的電腦或是網路設備已開啟。

確定網路線有正確連接在交換器和電腦或是網路設備上。